


D2892-1

- 1) MATERIAL: 17-4 PH STAINLESS STEEL
HEAT TREAT TO H900 CONDITION
(900°F FOR 1 HR, AIR COOL)
MIN UTS = 170 KSI (38 HRC)
- 2) IDENTIFY WITH DART LOGO (PER DART SUPPLIED GRAPHIC) AND PART NUMBER IN THIS AREA WITH 0.125 HIGH LETTERING 0.010-0.020 DEEP
- 3) BREAK ALL UNMARKED SHARP EDGES 0.010 TO 0.020
- 4) PART IS SYMMETRIC ABOUT CENTERLINE
- 5) TOLERANCES ARE PER DART QSI 018 (REF. X.XXX = ± 0.010) UNLESS OTHERWISE NOTED
- 6) ALL DIMENSIONS ARE IN INCHES
- 7) FINISH: POWDER COAT WHITE (REF. 4.3.5.2) PER DART QSI 005 4.3

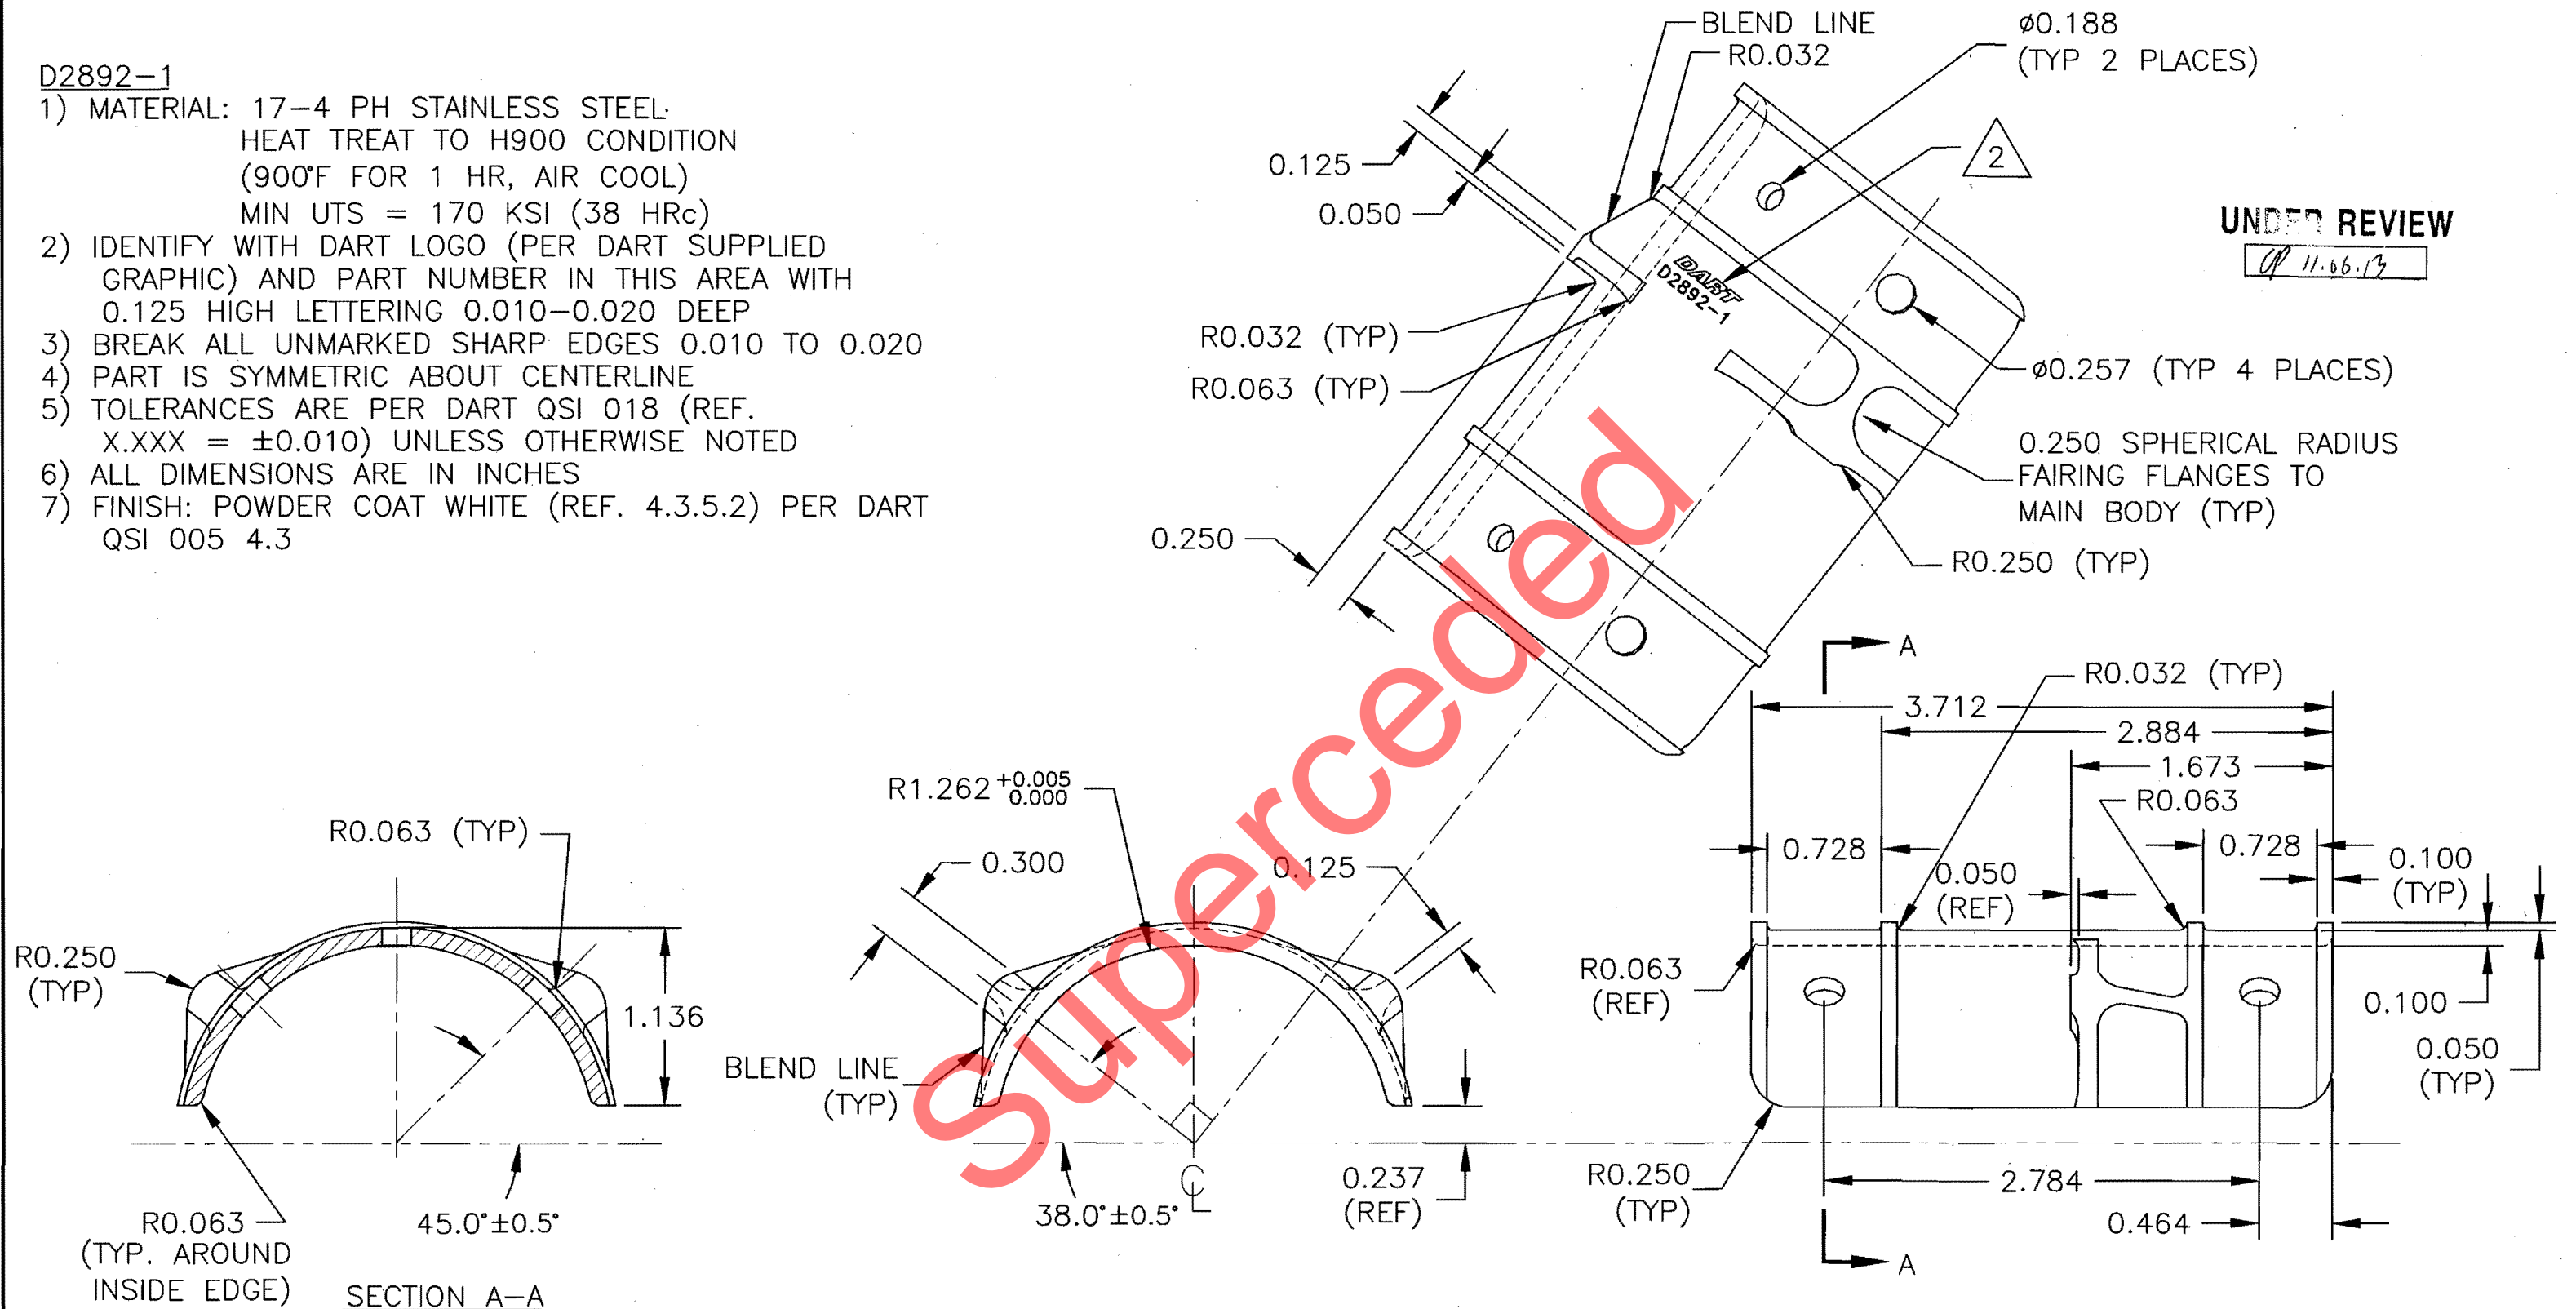

UNDER REVIEW

11.06.13



A		00.11.17	NEW ISSUE	
DESIGN	CP	DRAWN BY	CP	DART DART AEROSPACE LTD. HAWKESBURY, ONTARIO, CANADA
CHECKED	#	APPROVED	#	DRAWING NO. D2892
DATE	00.11.17	TITLE	2.500 SUPPORT	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.				REV. A SHEET 1 OF 1 SCALE 1:1